


# Pneumatic O cut off ball valve

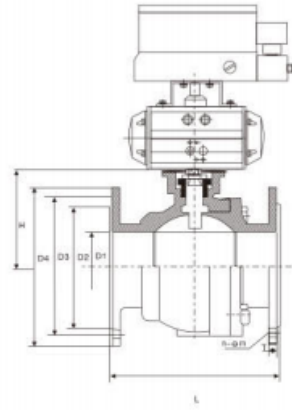

seleccionar	Consulta	DM	1.6MPa							2.5MPa							150 libras								
			l	D	D1	D2	b	F	norte-φd	l	D	D1	D2	b	F	norte-φd	F	norte-φd	l	D	D1	D2	b		
15	130	95	65	14	14	2	4-14	130	95	65	16	16	2	4-14	108	89	60.50	35	12	2	4-15				
20	140	105	75	14	14	2	4-14	140	105	75	16	16	2	4-14	117	98	70	43	12	2	4-15				
25	150	115	85	4	14	2	4-14	150	115	85	16	16	2	4-14	127	108	79.50	51	12	2	4-15				
32	165	135	100	16	16	2	4-18	165	135	100	18	18	2	4-18	140	117	89	63	12	2	4-15				
40	180	145	110	16	16	3	4-18	180	145	110	18	18	3	4-18	165	127	98.50	73	15	2	4-15				
50	200	160	125	16	16	3	4-18	200	160	125	20	20	3	4-18	178	152	120.50	92	16	2	4-19				
65	200	180	145	18	18	3	4-18	200	180	145	22	22	3	8-18	190	178	139.50	105	18	2	4-19				
80	250	195	160	20	20	3	8-18	250	195	160	22	22	3	8-18	203	190	152.50	127	19	2	4-19				
100	280	215	180	20	20	3	8-18	280	230	190	24	24	3	8-23	229	229	190.50	157	24	2	8-19				
125	320	245	210	22	22	3	8-18	320	270	220	28	28	3	8-25	356	254	216	186	24	2	8-22				
150	360	280	240	24	24	3	8-23	360	300	250	30	30	3	8-25	394	279	241.50	216	26	2	8-22				
200	400	335	295	26	26	3	12-23	400	360	310	34	34	3	12-25	457	343	298.50	270	29	2	8-22				